


Totally automated production
Highest quality, based on computerized SPC, yielding unmatched uniformity
Custom cutting and forming for difficult applications
Several standard contact materials for a broad range of applications and loads from dry circuit to power switching

Part Number		0213
Contact Form		1A
Contact Material		Rhodium

Electrical Ratings		
Contact Rating (max)	W/ VA	1.0
Switching Current (max)	A	0.1
Carry Current (max)	A	0.3
Switching Voltage (max)	VDC	24
Switching Voltage (max)	VAC	24
Breakdown Voltage (min)	VDC	150
Contact Resistance (max)	mΩ	200
Insulation Resistance (min)	Ω	10 ⁹
Contact Capacitance (min)	pF	0.4

Operating Characteristics		
Operate Time (Inc. Bounce)	ms	0.6
Release Time (max)	ms	0.05
Resonant Frequency (typ)	Hz	11000 ±2000
Operating Frequency (max)	Hz	500
Vibration 10-2000 Hz (max)	G's	20
Shock - 11ms, ½ Sine Wave (max)	G's	30
Operating Temperature	°C	-40 to +125
Pull-in Sensitivity	AT	10 ÷ 40

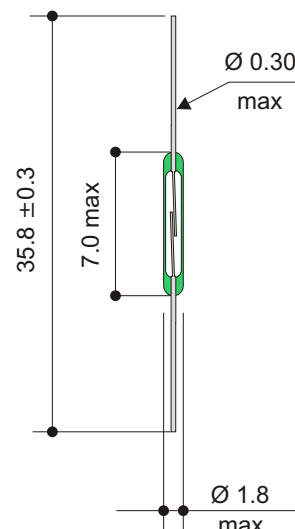

Dimensions expressed in mm

- Notes:**
- (1) The specification for VA Rating may be exceeded for less sensitive (high AT) switches, and should be decreased for very sensitive (low AT) switches.
 - (2) Breakdown voltage is measured in the presence of a radioactive ionizing source with switch leakage current limited to 100 microamperes.
 - (3) Contact resistance measurements are made at 10ma from a 1 Volt source with 5 AT overdrive using a 4 wire (Kelvin) measuring system with contact probes located on 1.7" centers.